



ROCKCURE



Flowing Epoxy System

To repair, reinforce and enhance natural stones


RAJ SPIRIT SUPPLIERS

Build with us

Working closely with our customers, we combine technical expertise, innovation and reliable quality to deliver practical solutions across the stone-processing chain.

For over more than 25 years of extensive knowledge and experience, Raj Spirit Suppliers specializes in developing high-quality stone treatment chemical solutions to entire processing chain.

With the help of our dynamic facilities, Raj Spirit Suppliers, is structured to provide an effective response to the specific needs of the Natural Stone and Quartz Industries with dedicated product lines to respond quickly to market developments and customization requests.

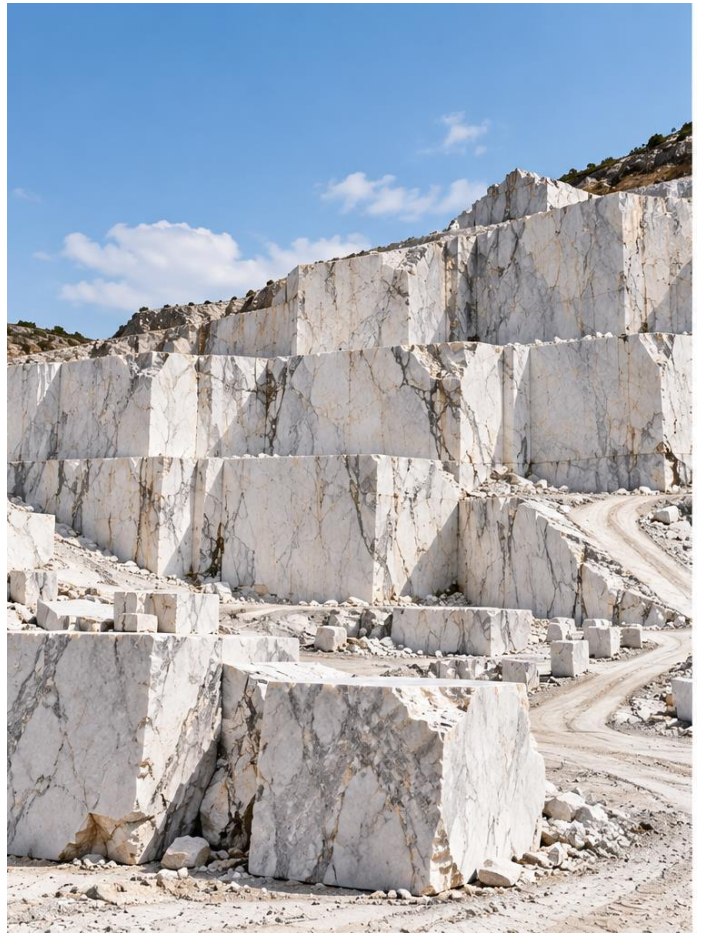

RockCure RS-511

Epoxy System 2:1 for Resining Top Layer



Epoxy system to resin stone and marbles. Especially designed where high penetration is required and where increase in the tone of the material is required. This system is very cost effective, giving advantage in competitive markets.

➤ *Medium viscosity*

➤ *Medium Hardness*

➤ *Superb Adhesion*

- ❖ **Appearance:** Clear Hazy Liquid
- ❖ **Mixing Ratio:** 100 : 50
- ❖ **Gel Time (25°C):** 25 – 40 min
- ❖ **Touch Dry (45°C):** 150 min

RockCure RS-311

Epoxy System 3:1 for Resining Dark Coloured stones



Especially designed to seal the marble surface by evenly forming protection layer and where increase in the tone of the material is required. This cost effective laminating system stands out in the competitive markets.

➤ *Low viscosity*

➤ *High Hardness*

➤ *Superb Adhesion*

- ❖ **Appearance:** Clear Hazy Liquid
- ❖ **Mixing Ratio:** 100 : 30
- ❖ **Gel Time (25°C):** 40 – 50 min
- ❖ **Touch Dry (45°C):** 190 – 210 min

RockCure RS-312

Epoxy System 3:1 for Crack filling, Reinforcement and Netting



High-performance epoxy system for crack filling and reinforcement of natural stone and marble. Designed for excellent penetration into cracks, fissures and porous areas without bleeding the deformities. Also, suitable for back netting the slabs, providing the strength to withstand slab movements.

- ❖ **Appearance:** Clear Hazy Liquid
- ❖ **Mixing Ratio:** 100 : 30
- ❖ **Gel Time (25°C):** 25 – 40 min
- ❖ **Touch Dry (45°C):** 150 – 170 min

➤ *Low viscosity*

➤ *High Hardness*

➤ *Superb Crack filling & Reinforcement*

RockCure RS-3501

Epoxy System 100:35 for Marble Block Vacuuming



Non-yellowing epoxy system specially formulated for marble block filling and reinforcement. Provides excellent penetration into cracks, strengthening the block and improving stone recovery. Keeping the natural tone of marble while providing strong adhesion, low shrinkage and reliable curing for efficient downstream processing.

- ❖ **Appearance:** Clear Liquid
- ❖ **Mixing Ratio:** 100 : 35
- ❖ **Gel Time (25°C):** 60 – 80 min
- ❖ **Touch Dry (25°C):** 24 – 36 hrs

➤ *Low viscosity*

➤ *High Penetration*

➤ *Excellent strength recovery*

RockCure MS-2511

Epoxy System 4:1 for Resining White Marbles



Designed to provide a natural, uniform appearance without significantly altering the original colour or character of the stone. Its advanced formulation combines rapid curing performance with excellent colour stability and non-yellowing, making it ideal for white coloured marbles and stones.

- ❖ **Appearance:** Clear Hazy Liquid
- ❖ **Mixing Ratio:** 100 : 25
- ❖ **Gel Time (25°C):** 15 – 25 min
- ❖ **Touch Dry (45°C):** 60 – 80 min

➤ *Low viscosity*

➤ *High Hardness*

➤ *High colour stability*

RockCure RS-2512

Epoxy System 4:1 for White Marble Crack Filling & Reinforcement



Non-yellowing epoxy system specially formulated for crack filling white marbles such as Satvrio, etc. Provides excellent penetration into cracks, keeping the natural tone of marble while providing strength. Rapid curing helps white natural shade to remain intact, stopping the cracks to appear dark.

- ❖ **Appearance:** Clear Hazy Liquid
- ❖ **Mixing Ratio:** 100 : 25
- ❖ **Gel Time (25°C):** 10 – 20 min
- ❖ **Touch Dry (45°C):** 50 – 70 min

➤ *Low viscosity*

➤ *High Penetration*

➤ *No crack bleeding & slab strengthening*

RAJ SPIRIT SUPPLIERS

H1-105, UDHYOG VIHAR, RIICO INDUSTRIAL
AREA, SUKHER, UDAIPUR, RAJASTHAN,
313004

P: +91-7742022470
info@rajspiritsuppliers.com